

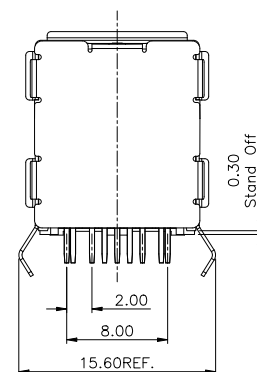
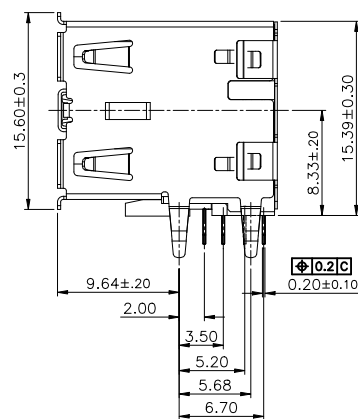
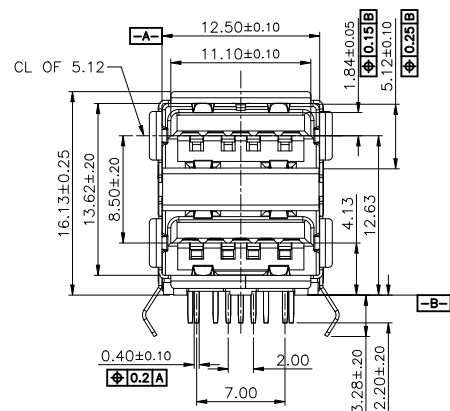
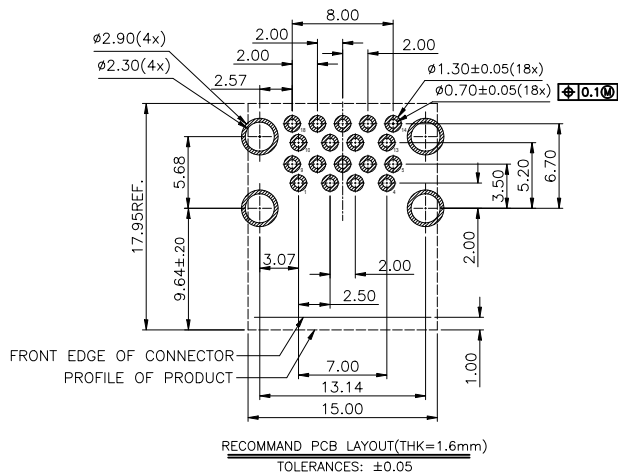


RoHS2. 0+HF

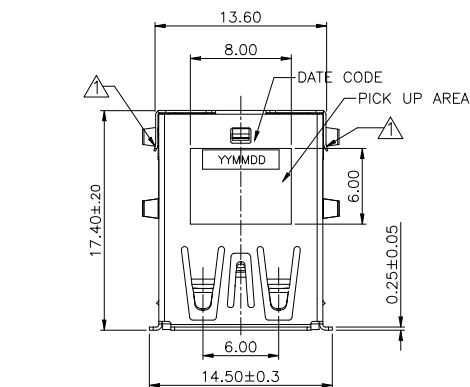

NOTES:

1. MATERIAL AND PLATING:

Housing/Cover: PA9T+30%G.F,Blue.
Contact: C5191,Au Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" Min UnderPlated.

Front Shell: SUS201, 50u" NICKEL PLATED.

Back/Middle: SUS201, NO PLATED.

2. MECHANICAL CHARACTERISTIC

Mating Force: 35N(3.57Kg) Max.

Unmating Force: 10N(1.02Kg) Min.

Durability: 5,000 Cycles.

3. ELECTRICAL CHARACTERISTIC

Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.

Voltage Rating: 30V AC Max.

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.

Dielectric Withstanding Voltage: 100V AC.

4. TEMPERATURE

Operating Temperature: -40°C~+85°C

Storage Temperature: -60°C~+105°C

5. DATECODE INFORMATION:

YMMDD (Y:YEAR M:MONTH D:DATE)

6. P/N:

UBB1H-18BH0 5 A N B-H


PIN NUMBER:
18PIN

CONTACT:
5:150" CONTACT AREA

H:HF

PACK:
B:TRAY

COLOR NUMBER
A:BLACK



USB3.0 CONTACT PIN					
PIN NO.	1/10	2/11	3/12	4/13	Shell
NAME	VBUS	D-	D+	GND	Shield
PIN NO.	5/14	6/15	7/16	8/17	9/18
NAME	StdA-SSR-	StdA-SSR+	GND-DRAIN	StdA-SST-	StdA-SST+

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC [®]			
A0	NEW RELEASE	2022. 2. 15		LINEAR	1:1	SKY	2022. 2. 15	UBB1H-18BH05ANB-H	ENDE05				
				ANGLES	APPROVED	-	-	TITLE					
			UNIT: MM	0.00±0.25	X.X±0.20	DESIGNER		DUAL STACK USB 3.0 A TYPE					
			SIZE: A1		X.XX±0.10	DRAWN	GSQ	RECEPTACLE STD RA DIP C/H=8.33mm					

REV A0 SHEET 1/2


RoHS2. 0+HF

PACKAGING INSTRUCTION:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER TRAY (S.P.Q.)	TOTAL TRAYS PER PRIMARY CARTON
UBB1H-18BH05ANB-H	1120(PCS)	56 (PCS)	20

1. 56pcs/盘






(底盒)




(在每一扎最顶部盖1PCS空底盒)


2. 10盘/扎
(560pcs)




3. 2 扎并排/箱
(1120pcs)

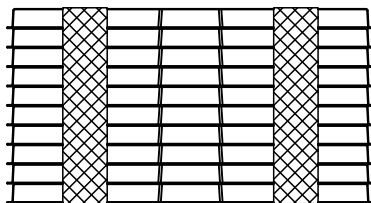

5. 外箱封成“工”字型

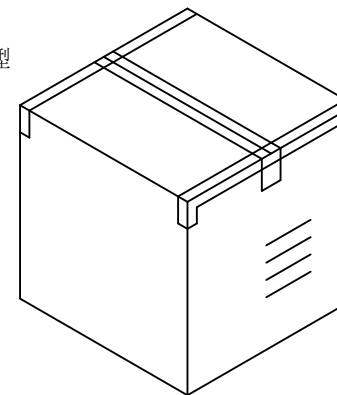

4. 1120pcs/箱

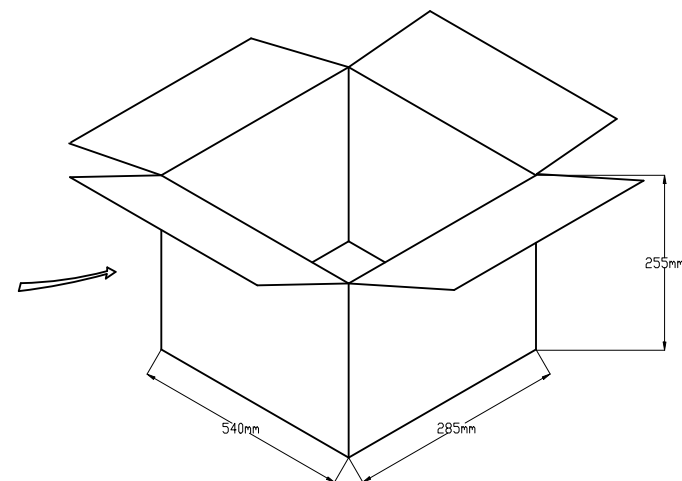

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
AO	NEW RELEASE	2022. 2. 15		LINEAR	ANGLES	APPROVED	SKY	2022. 2. 15	UBB1H-18BH05ANB-H	ENDE05				
				0.0±0.30	X. ±0.50	DESIGNER	-	-	TITLE DUAL STACK USB 3.0 A TYPE RECEPTACLE STD RA DIP C/H=8.33mm					
				UNIT: MM	0.00±0.25						X. X±0.20			
				SIZE: A1		X. XX±0.10	DRAWN	GSQ			2022. 2. 15			
REV	AO	SHEET	2/2											

JCTC®

REV	A0	SHEET	2/2
-----	----	-------	-----